



Standard Features

Non-Marking Tracks
Simple & Robust Design
Maintenance Free Batteries

Optional Extras


Operator Secondary Guarding

Working Height Max.
Overall Lift Capacity Max.
Overall Width
Overall Length
Overall Weight

7.8 m (25'7")
230 kg (507 lb)
1.01 m (3'4")
2.13 m (6'12")
1,740 kg (3,836 lb)

LS0610EC **Rough Terrain** **E-Drive Scissor**

TOUGH WORLD. TOUGH EQUIPMENT.

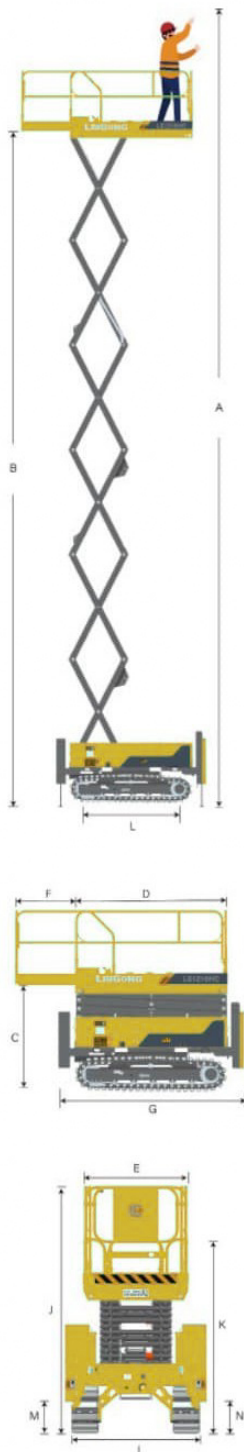

DIMENSIONS

A. Working Height Max.	7.8 m (25'7")
B. Platform Height Max.	5.8 m (19')
D. Platform Length	1.64 m (5'5")
E. Platform Width	0.75 m (2'6")
F. Extension Deck (Roll Out)	0.9 m (2'11")
G. Overall Length	2.13 m (6'12")
I. Overall Width	1.01 m (3'4")
J. Stowed Height (Rails Up)	2.21 m (7'3")
K. Stowed Height (Rails Down)	1.78 m (5'10")
M. Ground Clearance	0.12 m (4.7")

PRODUCTIVITY

Overall Lift Capacity	230 kg (507 lb)
Extension Deck Capacity	120 kg (264 lb)
Platform Occupancy Max. (Indoor/Outdoor)	2 / 1
Drive speed (Stowed)	2 km/h (1.2 mph)
Lift/Lower Time	25 / 22
Gradeability	30 %
Tilt Sensor Activation (Side to Side/Front to Back)	X 1.5° / Y 3°
Outrigger Leveling Angle	X 7° / Y 16°
Crawler	180 x 72 x 54 mm (7" x 2.8" x 2")

POWER

Battery	24 V / 225 Ah
Charger	24 V / 30 A
Lift Motor	3.3 kW
Drive Motor	1.5 kW

WEIGHT

Overall Weight	1,740 Kg (3,836 lbs)
----------------	----------------------

Access Service Australia & New Zealand

Head Office: 71 Bradman St Acacia Ridge QLD 4110
T: AU 1300 272 111 / NZ 0800 272 112
E: sales@accessservice.com.au

03/2025 Access Service



accessservice.com.au

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult Access Service Australia & New Zealand for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.