


Self-Propelled Electric Scissor Lifts

Specifications

MODEL	MAX WORKING HEIGHT* (m)	STOWED HEIGHT (m)	MAX OCCUPANCY (INSIDE / OUTSIDE)	GRADEABILITY*	WIDTH (m)	LENGTH (m)	GROSS WEIGHT (kg)	MAX LIFT CAPACITY Platform Total / Extension Deck (kg)
LS 0507EM	6.5	2.08	2 / 1	25%	0.76	1.49	895	240 / 110
LS 0608E	7.8	2.17			0.81	1.86	1,540	230 / 113
LS 0808E	10	2.36			0.84	2.48	2,180	230 / 113
LS 0812E	10	2.36			1.19	2.49	2,540	450 / 120
LS 1012E	12	2.50			1.19	2.49	2,780	350 / 120
LS 1212E	14	2.63			1.19	2.49	3,040	320 / 120
LS 1412E	15.7	2.62			1.25	2.84	3,300	250 / 113
LS 1414E	16	2.74	3 / 2		1.40	3.14	3,720	350 / 136

*Gradeability applies to driving on slopes "with platform stowed," see operator's manual for details regarding slope ratings. Gradeability may vary depending on options installed on machine.

*Maximum working height can be different when operated outside compared to inside. This figure is often reduced outside due to external factors such as wind. See operator's manual for details regarding outside and inside safety ratings.

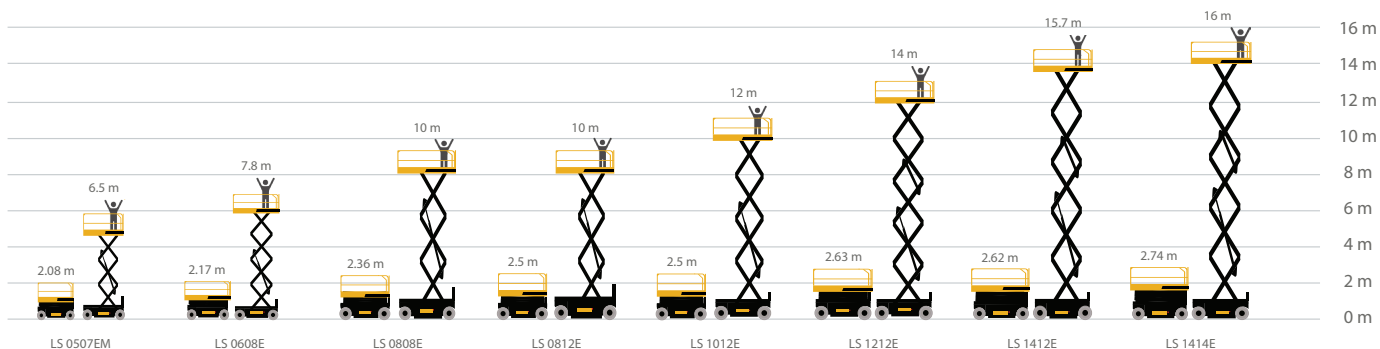

LS Series Scissor Centre of Gravity

MODEL	X (mm)	Y (mm)
LS 0507EM	580	340
LS 0608E	655	455
LS 0808E	826	394
LS 0812E	905	565
LS 1012E	930	600
LS 1212E	920	520
LS 1412E	1074	590
LS 1414E	1226	900

