



Standard Features





AC Drive Motors Maintenance Free
Batteries

Optional Extras

Operator Secondary Guarding
Pedestrian Proximity Alert

Working Height Max.	7.8 m (25'7")
Overall Lift Capacity Max.	230 kg (507 lb)
Overall Width	0.81 m (2'8")
Overall Length	1.86 m (6'1")
Overall Weight	1,540 kg (3,395 lb)

LS0608E **Electric Scissor** **Lifts E-Drive**

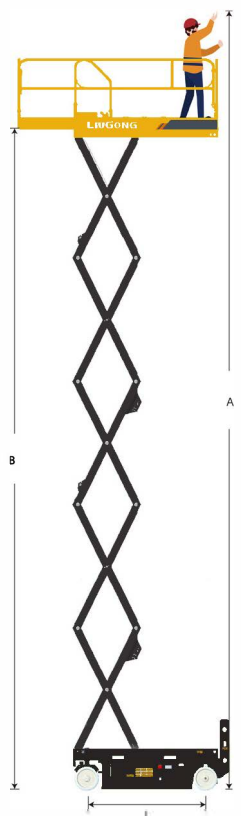

DIMENSIONS

A. Working Height Max.	7.8 m (25'7")
B. Platform Height Max.	5.8 m (19')
C. Platform Height (Stowed)	1 m (3'3")
D. Platform Length	1.64 m (5'5")
E. Platform Width	0.75 m (2'6")
F. Extension Deck (Roll Out)	0.9 m (2'11")
G. Overall Length	1.86 m (6'1")
H. Overall Length (Without Ladder)	1.72 m (5'8")
I. Overall Width	0.81 m (2'8")
J. Stowed Height (Rails Up)	2.01 m (6'59")
K. Stowed Height (Rails Down)	1.73 m (5'8")
L. Wheelbase	1.37 m (4'6")
M. Ground Clearance (Pothole Raised)	85 mm (3")
N. Ground Clearance (Pothole Deployed)	18 mm (0.7")

PRODUCTIVITY

Overall Lift Capacity Max.	230 kg (507 lb)
Extension Deck Capacity	113 kg (249 lb)
Platform Occupancy Max. (Indoor/Outdoor)	2 / 1
Drive Speed (Stowed)	2 km/h (1.24 mph)
Drive Speed (Raised)	0.3 km/h (0.19 mph)
Turning Radius (Inside/Outside)	0.3 / 1.78 m (11" / 5'10")
Lift/Lower Time	25 / 22 s
Gradeability	25 %
Tilt Sensor Activation (Side to Side/Front to Back)	X 1.5° / Y 3°
Tire Size (Solid Non-marking)	356 x 114 mm (1'2" x 4")

POWER

Battery	24 V / 225 Ah
Lithium Battery (Optional)	24 V / 105 Ah
Charger	24 V / 30 A
Lifting Motor	24 V / 3.3 kW
Drive Motor	24 V / 0.6 kW
Hydraulic System Volume	8 L (2 gal)
Hydraulic Tank Capacity	6 L (1 gal 5pt)

WEIGHT

Overall Weight	1,540 kg (3,395 lb)
----------------	---------------------

Access Service Australia & New Zealand

Head Office: 71 Bradman St Acacia Ridge QLD 4110
T: AU 1300 272 111 / NZ 0800 272 112
E: sales@accessservice.com.au

02/2025 Access Service



accessservice.com.au

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult Access Service Australia & New Zealand for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.